

266 COMPRESSOR / GATE

dbx[®]
PROFESSIONAL PRODUCTS

VISIONARY DESIGN

Most compressor/gates provide less than musical compression, coupled with gating that swallows transients—or closes early, cutting off decay and reverb tails. The superb engineering in the 266XL ensures that both its compression and gating provide versatility and excellent sonic performance in situations where other compressor/gates typically produce undesirable processing artifacts.

When using the 266XL's AutoDynamic™ Attack and Release controls, artists and engineers will find that the center settings deliver classic dbx compression, while the full control range produces voicings that extend from slow "leveling" to aggressive "peak" limiting.

The Auto Dynamic™ circuitry continuously adjusts the actual attack and release times to optimally match the program material. Since users aren't restricted to using the Attack and Release controls only in "peak" operation, they can tailor the response of the 266XL for individual tracks, mixed program material, special effects or system protection. As a result, production studios can use the versatile 266XL to replace multiple "single-purpose" limiters while sound reinforcement users can standardize on the 266XL for all of their applications.

The 266XL's advanced gate circuitry uses a completely new, program-dependent timing algorithm to produce ultra-smooth release characteristics—even with complex signals, such as voice or reverb decays. dbx engineers went on to take advantage of the wide dynamic range and high precision of the dbx VCA to design in an extra-wide threshold range and ensure top gating performance for each application.

Separate precision LED displays for gain reduction, compression threshold and gate threshold allow quick, accurate setup, while the 266XL's intuitive operation lets users easily smooth uneven levels, add sustain to guitars, squash drums or tighten up mixes. In Stereo couple mode, the Channel 1 controls become Master controls, and Channel 2 follows precisely to ensure a rock solid stereo image—even with high amounts of compression. Professionals and newcomers will find that the 266XL sets up rapidly and musically the first time it is used, and every time thereafter.


Designed and manufactured in the USA, the dbx 266XL processor is the result of an intensive engineering and product development effort aimed at taking advantage of the latest and best advances in manufacturing technology to deliver true dbx audio performance and reliability to our customers at the lowest possible cost. The 266XL puts a completely new level of compressor/gate performance within everyone's reach.

FEATURES

- Goof proof operation to smooth uneven levels, add sustain to guitars, fatten drums or tighten up mixes.
- New gate timing algorithms ensure the smoothest release characteristics.
- Program-adaptive expander/gates.
- Great sounding dynamics control for any type of program material
- Separate precision LED displays for gain reduction, compression threshold and gate threshold allow quick, accurate setup.
- Stereo or dual-mono operation.
- Balanced inputs and outputs on 1/4" TRS and XLR.
- Side Chain insert.
- Classic dbx "Auto" mode.



H A Harman International Company

8760 S. Sandy Pkwy
Sandy, Utah 8407C
Phone (801) 568-766C
Fax (801) 568-7662
Int'l Fax (219) 462-4596
customer@dbxpro.com
http://www.dbxpro.com

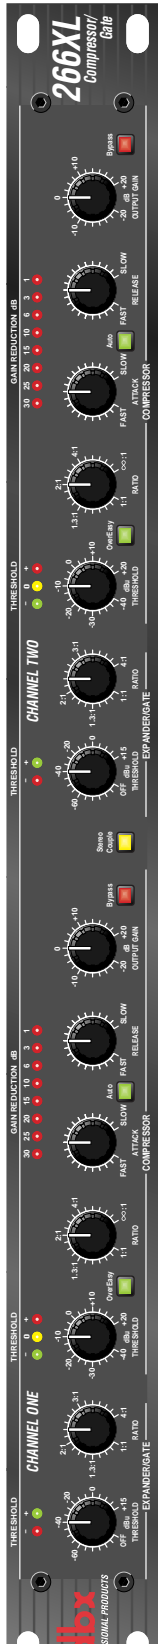

266

COMPRESSOR / GATE

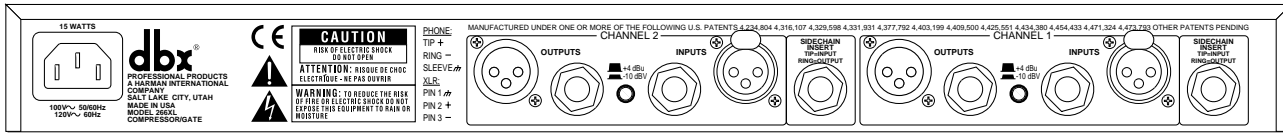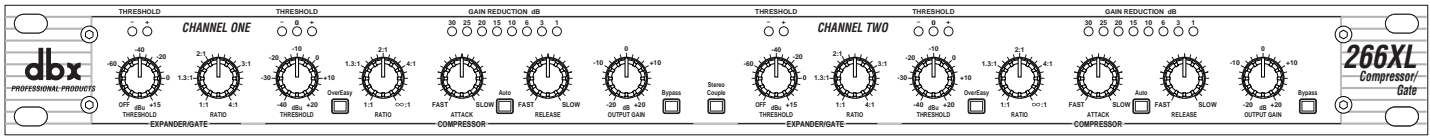

ARCHITECTS' AND ENGINEERS' SPECIFICATIONS

The compressor/gate shall have two identical channels, each with an audio frequency response of 5Hz-40kHz, +0, -0.5dB, a balanced input impedance of not less than 40kΩ, with a maximum input level of not less than +21dBu and a 1/4" TRS input connector. The output impedance shall be no more than 50Ω unbalanced, 100Ω balanced with a maximum output level of not less than +20dBu, a minimum load impedance at not more than 600Ω and the connector type shall be 1/4" TRS. Total Harmonic Distortion shall be less than 0.2% with any amount of compression at 1kHz, and Intermodulation Distortion shall be less than 0.2%. The unit shall have an output noise level of not more than -93dBu unweighted, and a dynamic range not less than 114dB. Outputs shall be gain adjustable in the amount of ±20dB from nominal gain via front-panel Output Gain controls, and all outputs shall be capable of driving a short circuit indefinitely with maximum input applied. The compressor attack and release times shall be scalable and program dependent. The gate attack time shall be <100µsec. The compression threshold shall range from -40 to +20dB. The gate threshold range shall be from -60 to +10dBu. The compressor/gate shall have a stereo coupling switch as well as the following controls for each channel: Compressor Threshold, Compressor Ratio, Attack, Release, Auto switch Output, Gain, Expander/Gate Threshold, Expander/Gate Ratio, Bypass. The following metering LEDs shall exist for each channel: Compressor Threshold (Below, At Above), Gain Reduction and Gate Threshold (Above and Below). The unit shall operate from a power source of 100 VAC 50/60 Hz to 120 VAC 60 Hz for a domestic unit and 230 VAC 50 Hz for a european unit via IEC type AC cable and shall consume no more than 15 W. The net weight shall be 7lbs. (3.2kg). The unit shall be a **dbx** 266XL Compressor/Gate.

dbx® engineers are constantly working to improve the quality of our products. Specifications are, therefore, subject to change without notice.

SPECIFICATIONS

FREQUENCY RESPONSE:

Flat: 20Hz-20kHz, +0, -0.5dB
 Bandwidth: 0.35Hz-80kHz, +0, -3dB
 Input impedance: 40kΩ Balanced/Unbalanced
 Max Level: +22dBu

OUTPUT:

Impedance: Balanced
 +4dBu: Balanced: 200Ω
 Unbalanced: 100Ω
 -10dBV: Balanced: 1.5kΩ
 Unbalanced: 750Ω
 Max Level: +21dBu into 600Ω

SIDE CHAIN INSERT:

Input Impedance: >10kΩ
 Output Impedance: ≤2kΩ
 Max Level: +21dBu
 Distortion + Noise: <0.2% any amount of compression at 1kHz

Intermodulation Distortion:

<0.2% SMPTE

Noise:

<-93dBu unweighted

Dynamic Range:

>114dB, unweighted

Crosstalk:

<-93dB @ 1kHz

Common Mode Rejection:

>40dB (Any Frequency)

Stereo Coupling:

True RMS Power Summing™

Threshold Characteristics:

Selectable OverEasy® or hard knee

Exp/Gate:

Program Dependent Threshold

Compressor: -40 to +20dB

Expander/Gate: -60 to +10 dB

Ratio:

Compressor: 1:1 to ∞:1

Expander/Gate: 1:1 to 4:1

Attack Time:

Compressor: Scalable Program Dependent

Expander/Gate:

<100 µsec

Release Time:

Compressor: Scalable Program Dependent

Expander/Gate:

Program Dependent

Power Requirements:

15watts, 100 VAC 50/60 Hz, 120 VAC 60 Hz,

230 VAC 50/60 Hz

DIMENSIONS:

(H x W x D) 1.75"x5.75"x19" (4.45cm x14.6cm x

48.5cm)

WEIGHT:

Net Weight: 5 lbs. (2.3 kg);

Shipping Weight: 7 lbs. (3.2 kg)



FOR MORE INFORMATION CONTACT:

dbx Professional Products

8760 S. Sandy Pkwy.

Sandy, Utah 84070

Phone (801) 568-7660

Fax (801) 568-7662

Int'l Fax (219) 462-4596

customer@dbxpro.com