


COMMERCIAL AUDIO SERIES

**180A
280A
1160A**

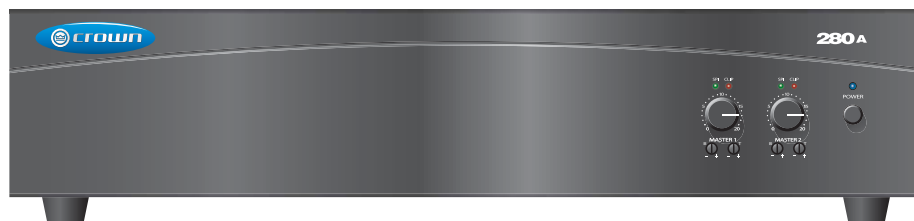

The Crown® 180A, 280A, and 1160A are high-value amplifiers for commercial and industrial audio. They provide 4-ohm and constant-voltage outputs (70V and 100V). The amps are part of Crown's Commercial Audio Series, which also includes mixers and mixer-amps. These low-cost units provide all necessary features in a simple building-block format.

The amplifiers vary in their number of inputs, number of outputs, and power range:

- 180A has 1 input and one 80W power amplifier for single-zone systems.
- 280A has 2 inputs and dual 80W power amplifiers for two-zone systems.
- 1160A has 1 input and one 160W power amplifier for single-zone systems.

Some applications include schools, hospitals, factories, restaurant/retail, houses of worship, fitness facilities, A/V boardrooms, prisons, and small offices. Typical uses are paging, background music, security and evacuation instructions.

The sound system can be upgraded as a facility expands. For example, you can add more mixers for more inputs, or add more power amps (or mixer-amps) to handle more zones.

Specifications

Performance

Frequency Response (at 1 watt from 4-ohm tap): 70 Hz to 19 kHz +/- 1 dB.

Frequency Response (at line out): 20 Hz to 20 kHz +/- 1 dB.

Power Bandwidth (at 4-ohm tap, 2 dB below maximum 1 kHz power): 50 Hz to 20 kHz with < 0.5% THD

Signal to Noise Ratio (ref. to rated power, master volume at minimum): 85 dB.

DC Output Offset: < ±5 mV.

THD: Less than 0.5% at rated power at 1 kHz.

Input Sensitivity (for full output at maximum gain): 800 mV.

Input Impedance (nominal): 100 kilohms.

Minimum Load Impedance:

100V output: 160 ohms.

70V output: 80 ohms.

4-ohm output: 4/8 ohms.

Crosstalk (all controls at "10"): -70 dB at 1kHz.

Line Output Level (nominal): 1V into 10 kilohms.

AC Line Voltages Available:

100V 50/60 Hz

120V 60 Hz

220V 50/60 Hz

230V 50/60 Hz

240V 50/60 Hz

Features

- 1 or 2 inputs, 1 or 2 amplifier output channels.
- Ideal for commercial and industrial use
- Balanced Phoenix-type line inputs; touch-proofed screw-terminal speaker outputs
- Advanced protection system includes output current limiting, DC protection, circuit breaker/fuse, and thermal protection; details available online at www.crownaudio.com
- Three-Year, No-Fault, Fully Transferable Warranty completely protects your investment and guarantees its specifications

180A

*1 kHz Power

Minimum guaranteed power into 4 ohms or 70V/100V output **80W**

*1 kHz Power: refers to maximum power in watts at 1 kHz with 0.5% THD.

280A

*1 kHz Power

Minimum guaranteed power per channel into 4 ohms or 70V/100V output **80W**

*1 kHz Power: refers to maximum power in watts at 1 kHz with 0.5% THD.

1160A

*1 kHz Power

Minimum guaranteed power into 4 ohms or 70V/100V output **160W**

*1 kHz Power: refers to maximum power in watts at 1 kHz with 0.5% THD.

Operating Temperature/Humidity: 0° C to 40° C at 95% relative humidity (non-condensing).

Storage Temperature: -20° C to 85° C.

Front Panel Controls and Indicators

Power Switch: Pushbutton on-off switch. The power switch does not affect the 24V DC auxiliary power input.

Power Indicator: Blue LED indicates power on.

Output Signal Presence Indicator: Green LED, one for each output channel, illuminates when output signal level exceeds 100 mV (45 dB below full power) from the 4-ohm tap.

Clip Indicators: Red LED, one per output channel. Illuminates at threshold of audible distortion.

Master Volume Controls: One per output channel. Detented potentiometer with knob.

Tone Controls: Bass and Treble non-detented potentiometers on each channel. Bass ±10 dB at 100 Hz, Treble ±10 dB at 10 kHz.

Back Panel Controls and Connectors

Reset Switch: Resets the circuit breaker that protects the power supply. 220/230/240V units have a fuse instead.

AC Power Inlet: Detachable IEC.

Auxiliary Power Input: 2-position terminal strip for 24 VDC (±10%) backup power. Accepts up to 14 AWG terminal forks.


Amplifier Outputs Connectors: One per channel, 4-position terminal strip with COM (Common), 4 ohms, 70V and 100V terminals. Accepts up to 10 AWG terminal forks. Non-touch cover included.

Output VCA Connector: One for every two channels, 4-pin Phoenix-type connector for two VCA control lines of +10 VDC and ground. Compatible with Crown 1-VCAP and 4-VCAP modules.



INSTALLED

180A
280A
1160A

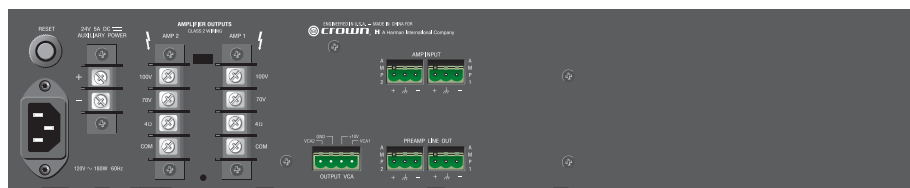

280A back panel. 180A and 1160A are similar except for the number of channels.

Line Out Connector: One 3-pin balanced Phoenix-type connector per output channel. Post master, pre-VCA. Level controlled by master volume control.

Amp Input Connector:

3-pin Phoenix-type, high-impedance balanced, one per amplifier channel.

Cooling

Convection cooled.

Protection

Current Limit Protection: Included.

Thermal Limit Protection: Over-temperature thermal cutout.

DC-Fault Load Protection: Included.

Included Accessories

- Power cord
- Detachable rack ears
- Screws for rack ears
- Non-touch cover for output connectors
- Phoenix-type connectors
- Spade lugs

Optional Accessories

- 1-VCAP remote volume control for one channel.
- 4-VCAP remote volume control for four channels.

Dimensions

EIA Standard 19-inch (48.3-cm) rack mount width (EIA RS-310-B) with rack ears, 3.5-inch (8.9-cm) height and 12.2-inch (31.0-cm) depth behind the mounting surface (not including non-touch cover). 4.1 inches (10.5 cm) high including feet. 13.9 inches (35.2 cm) deep from front of knobs to back of non-touch cover.

Weight

Net Weight:

- 180A: 21.0 lb (9.5 kg)
- 280A: 25.3 lb (11.5 kg)
- 1160A: 25.3 lb (11.5 kg)

Shipping Weight:

- 180A: 26.0 lb (11.8 kg)
- 280A: 30.3 lb (13.7 kg)
- 1160A: 30.3 lb (13.7 kg)



A Harman International Company

Crown International
1718 W. Mishawaka Rd.
Elkhart, IN 46517-9439
TEL: 574-294-8200
FAX: 574-294-8FAX
www.crownaudio.com

Specifications subject to change without prior notice. Latest information available at www.crownaudio.com.

Crown and Crown Audio are registered trademarks of Crown International. Other trademarks are the property of their respective owners. Printed in U.S.A.

© 2007 Crown Audio®, Inc.

Crown's Three-Year, No-Fault, Fully Transferable Warranty

Crown offers a Three-Year, No-Fault, Fully Transferable Warranty for every new Crown amplifier—an unsurpassed industry standard. With this unprecedented No-Fault protection, your new Crown amplifier is warranted to meet or exceed original specifications for the first three years of ownership. During this time, if your amplifier fails, or does not perform to original specifications, it will be repaired or replaced at our expense. About the only things not covered by this warranty are those losses normally covered by insurance and those caused by intentional abuse. And the coverage is transferable, should you sell your amplifier.

See your authorized Crown dealer for full warranty disclosure and details. For customers outside of the USA, please contact your authorized Crown distributor for warranty information or call 574-294-8200.